


# PEM FORD 9" FLOATER HOUSING ORDERING FORM

636.629.6200 fax 636.629.6207

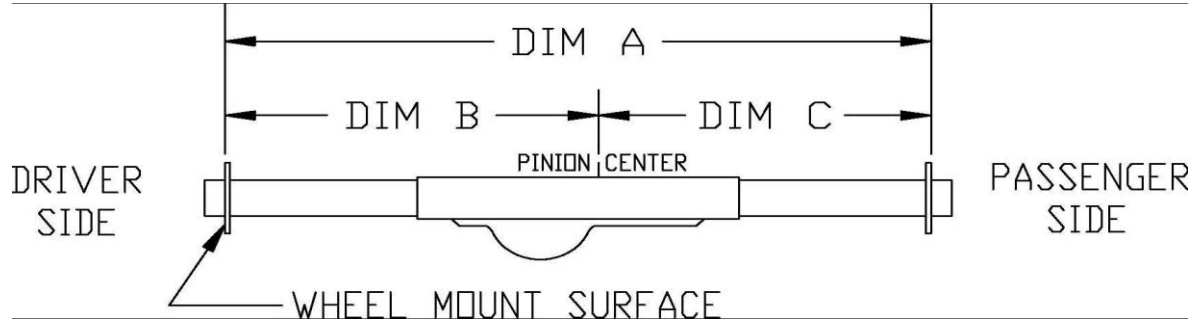

- **Dimension A:** Overall Length; Hub Face to Hub Face
- **Dimension B:** Driver side; Hub Face (Driver side) to Pinion Centerline
- **Dimension C:** Pass. side; Hub Face (Passenger side) to Pinion Centerline

Dimension A: \_\_\_\_\_ Dimension B: \_\_\_\_\_ Dimension C: \_\_\_\_\_

• **Center is a New Stamped Center HNF9**

• **Snouts:**

*we need to know pinion angle for the cambered snout*

2.5" GN snout \_\_\_\_\_ 1 degree 2.5" GN snout LR \_\_\_\_\_ RR \_\_\_\_\_

Mini 5 or Coleman IMCA snout \_\_\_\_\_ wide 5 snout \_\_\_\_\_ 2" GN Howe/Vogel \_\_\_\_\_

• **Axle Tube Material:**

.188" wall D.O.M \_\_\_\_\_

.188" wall Chrome Moly \_\_\_\_\_

.250" wall D.O.M. \_\_\_\_\_

.625" Heavy wall D.O.M for LR \_\_\_\_\_

Centerless Ground Rear End Tubes 2.999" to 3.00" \_\_\_\_\_

• **GM Metric Brake Brackets**

weld on installed \_\_\_\_\_

• **PEM Hub Sets:**

GNHK5x4 ¾ \_\_\_\_\_ 5x4 ¾ Grand National with steel drive flange

GNHK5x5 \_\_\_\_\_ 5x5 Grand National with steel drive flange

5/8" coarse Hub Wheel studs standard long \_\_\_\_\_ short \_\_\_\_\_

• **Brake Rotors:**

.810" wide x 11.75" OD vented \_\_\_\_\_ 1.0" wide x 11.75" OD Wilwood Spec 37 \_\_\_\_\_

• **Axle Sets:**

28 spline solid \_\_\_\_\_

31 spline solid \_\_\_\_\_

31 spline Gun Drilled \_\_\_\_\_

NOTE: Axle lengths will match accompanying housing dimensions